


EASIWALL – LIVING WALL SYSTEM

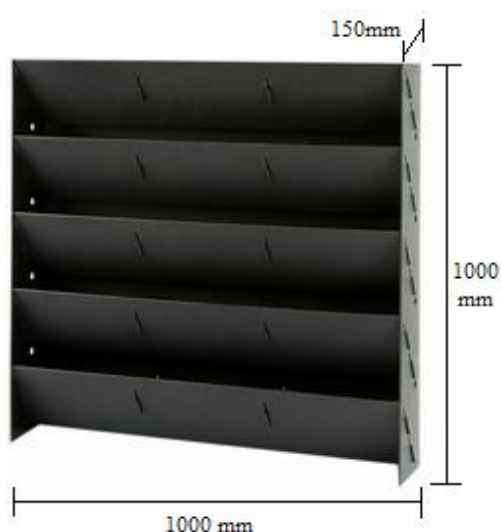

Product Notes

Designed and developed in house by Treebox, the **Easiwall** system is a modular design living façade system designed to provide ample growing room for a wide variety of plants. Can be used to brighten up a façade or introduce greenery into courtyards, balconies and light-wells.

- ✓ Residential and commercial applications.
- ✓ Suitable for both interior and exterior applications
- ✓ Can be scaled up by simply adding modules.
- ✓ Low water consumption only 1ltr/sqm per day
- ✓ Panels are easily modified with standard tools.
- ✓ Planted in situ and easily replanted if required
- ✓ Robust and Fast to install
- ✓ Free standing load to 1mtr height



Standard dimensions (mtrs)	1x1/1x2/0.5x1/0.5x2
Empty unit weight	15.2kg
Planted weight	70kg/sqm
Withstanding loads	100kg/m ²
Main irrigation line	16-32mm
Drip line	12-16mm, 150 cts
Nutrient feeding unit	Optional, Dosatron
Trough depth	200mm
Pot size	1-1.5liter plants
Plants density per sqm	25-35
Design life	10years

Vegetated panel	Vegetated vertical cladding panel with waterproof barrier made from recycled polypropylene. Planted with herbaceous varieties in a blended organic/inert substrate. Utilizing artificial irrigation.	Manufacturer: Treebox Ltd Material: 5mm Poly prop Type: Easiwall Pro
Loadings	Easiwall Pro standard 1x1 msq unit weighs 15.2 kg - empty. Fully planted unit with mature plants and saturated substrate weighs 70kg / sqm	Manufacturer: N/A Material: Poly propylene Type: Easiwall pro
Support rails	When fixing the unit to a wall, it is recommended that horizontal and/or vertical supports rails are used for even load distribution. Seek Architect and structural engineers' specifications if required. <i>J Rails can provide an air gap between original structure & vegetated panels.</i>	Manufacturer: SAPA Profile UK Material: Aluminium alloy Type: Alloy 6063HIP
Fixings	Once assembled, each Easiwall-Pro panel requires a minimum of 4 fixings. Ideal fixing points have been provided on each panel. Panels Can be side-fixed to posts or into supporting wall. M8-M10 masonry anchors also suitable.	Manufacturer: Chidean Industrial Corporation Material: Stainless steel Type: M6 Stainless
Substrate	A blend of organic and inert minerals used as standard. Where vegetation is regularly changed a higher compost volume should be used, e.g. edible walls.	Manufacturer: Optigreen UK Material: Roofing substrate Type: Intensive Type I

Gardening is looking up

Treebox Ltd, Penten Estates, 288 Haydon's Road, London SW19 8JZ
Telephone: 020 8543 4530 Email: info@treebox.co.uk Web: www.treebox.co.uk
Vat no. 978421973 Company no. 6970272

EASIWALL – LIVING WALL SYSTEM



Irrigation	Dripline is PCND line with outlets at 150mm centres at a rate of 1.6L per hour per dripper. 30 dripper per sqm. Control via suitable GSM unit (Heron or similar) Refer to irrigation spec sheet for more detail.	Manufacturer: Heron Type: Automated Type: Tank and pump
Planting	Use 1ltr size plants at density of 25-35 per sqm planted in situ, species should typically have a Growth height between 300-600mm, 90% to be evergreen for year round coverage avoid grouping deciduous varieties together.	Manufacturer: N/A Material: Type:
Waterproofing Drainage	Recommend use of a DPM or similar membrane to cover entire area behind installation to prevent water ingress. Excess water captured within concealed PVC gutter and direct to nearest suitable drainage point beneath finished surfaces.	Manufacturer: Treebox Ltd Material: PVC Type: 120mm square profile

Installation Notes

- 1) **Cover supporting wall**, with DPM or similar membrane to cover entire area behind installation to prevent water ingress, make sure to direct membrane into gutters and any perimeter trims.
- 2) **Mount horizontal 'J' rails**, or timber battens using suitable fixings into supporting wall at 600 maximum ctrs
- 3) **Pre assemble Easiwall panels**, and mount onto Rails or battens at 4 points per panel
- 4) **Insert irrigation lines**, throughout system and direct to control valves. Use vertical stacks per zone and branch horizontal Drip lines from main line stack.
- 5) **Fill with approved substrate**, in all troughs level with internal dividers
- 6) **Planting**, work to design in grid like pattern starting from the top preferably, firm all root balls into substrate making sure no air gaps remain and drip lines are concealed behind the plants.

Additional Notes

These notes are for guidance only. Visit Treebox website for a full list of recommended plants and further information on maintenance.

Easiwall- Pro units are available in the following dimensions 0.5m(w) x 1.0m(h), 0.5m(w) x 2.0m(h) and 1.0m(w) x 2.0m(h).

Gardening is looking up

Treebox Ltd, Penten Estates, 288 Haydon's Road, London SW19 8JZ
Telephone: 020 8543 4530 Email: info@treebox.co.uk Web: www.treebox.co.uk
Vat no. 978421973 Company no. 6970272